

Performance curves

Pump CTX40-165






» All about your flow™

General data

Impeller type Open	Selected Ø 165 [mm]	Max. diameter 165 [mm]	Min. diameter 120 [mm]	Speed 1450 [rpm]	Stages number 1
------------------------------	-------------------------------	----------------------------------	----------------------------------	----------------------------	---------------------------

Operating data

Capacity	Head	Efficiency	Power on shaft	Max power @ rated impeller	NPSHr	Q/Qbep
Density 1.000[kg/dm³]	Kinematic viscosity 1.0 [cSt]	Viscosity coeff. Cq 1.00	Viscosity coeff. Ch 1.00	Viscosity coeff. Cη 1.00	Fluid Water	

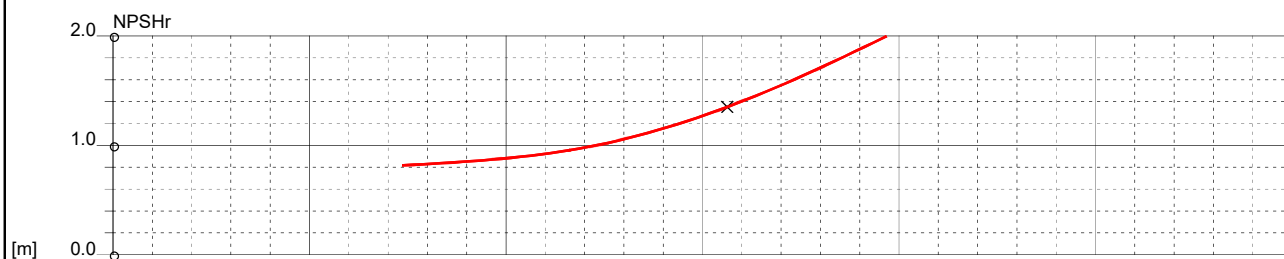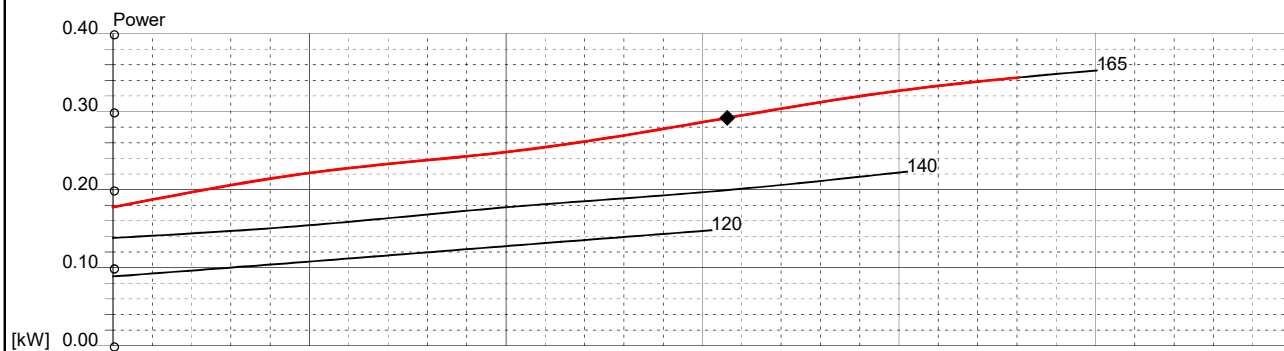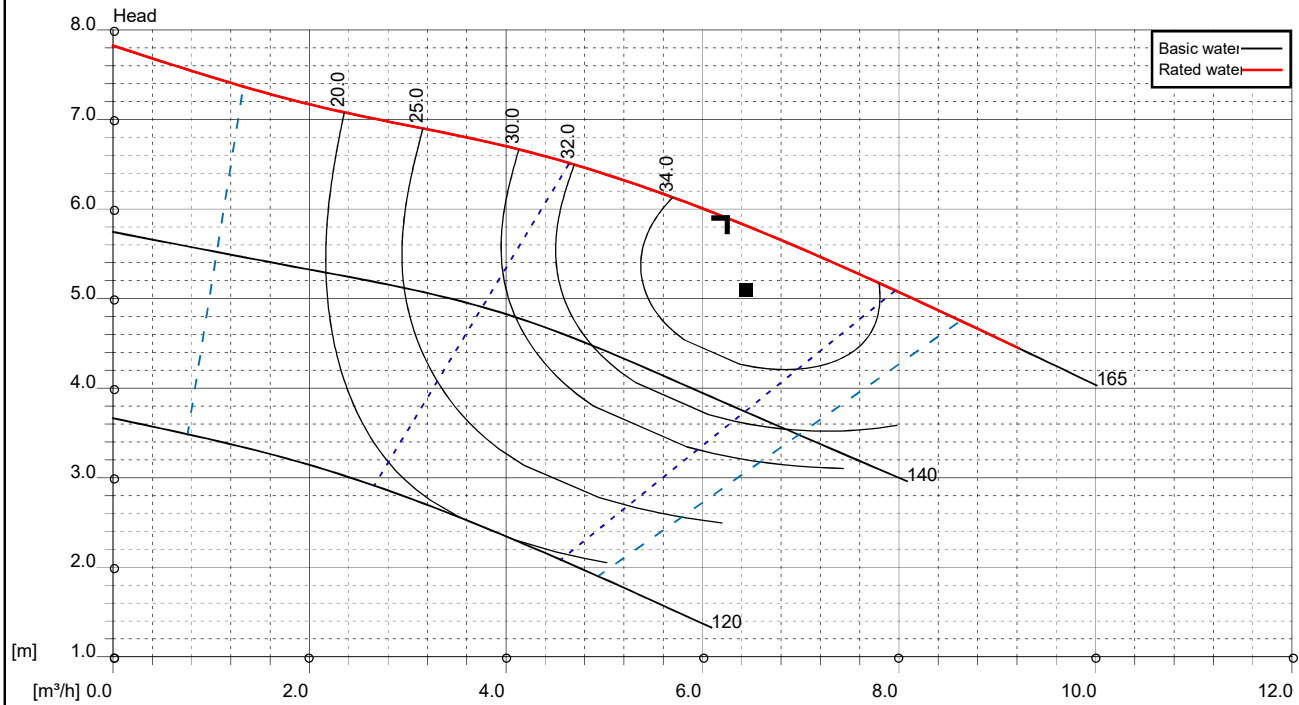

Customer/Purchaser	Project	Service
Curve N.	Impeller	Diffuser